
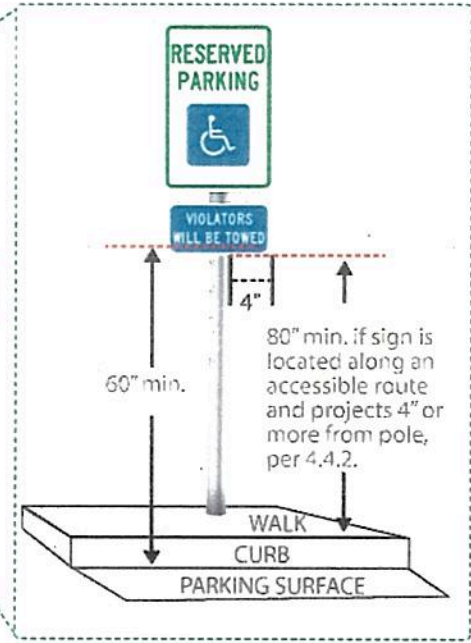


Sign with international symbol of accessibility and "van accessible" designates van accessible parking

Curb ramp installed outside access aisle area

Accessible route entrance

Level access aisle

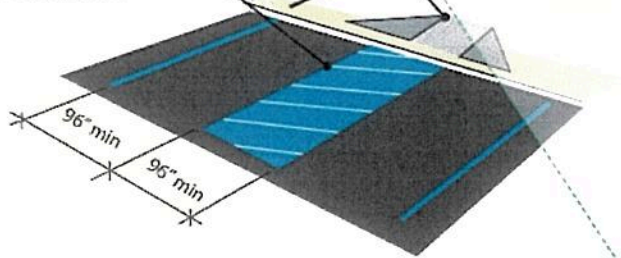

Code relates to signs.

ADA Sign Mounting Height Requirements

The baseline of the tactile copy can be mounted **between 48"** at the lowest point to 60" at the highest point. This allows signs of different sizes to be mounted on the same visual plane.

Elevator cars are excluded from this rule.

